




Electrical Characteristics	
Impedance	50 Ω
Frequency Range	0–4 GHz
V.S.W.R.	≦ 1.35 (R/A)
Dielectric Withstanding Voltage	≧ 800 VRMS at sea level
Mechanical Characteristics	
Plastic housing retention force	≧ 90N
Temperature range	-40°C/+105°C



RECOMMENDED
CRIMPING TOOL SIZE

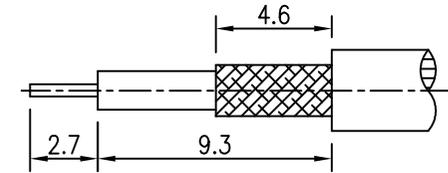

RECOMMENDED
CABLE STRIPPING DIM'S

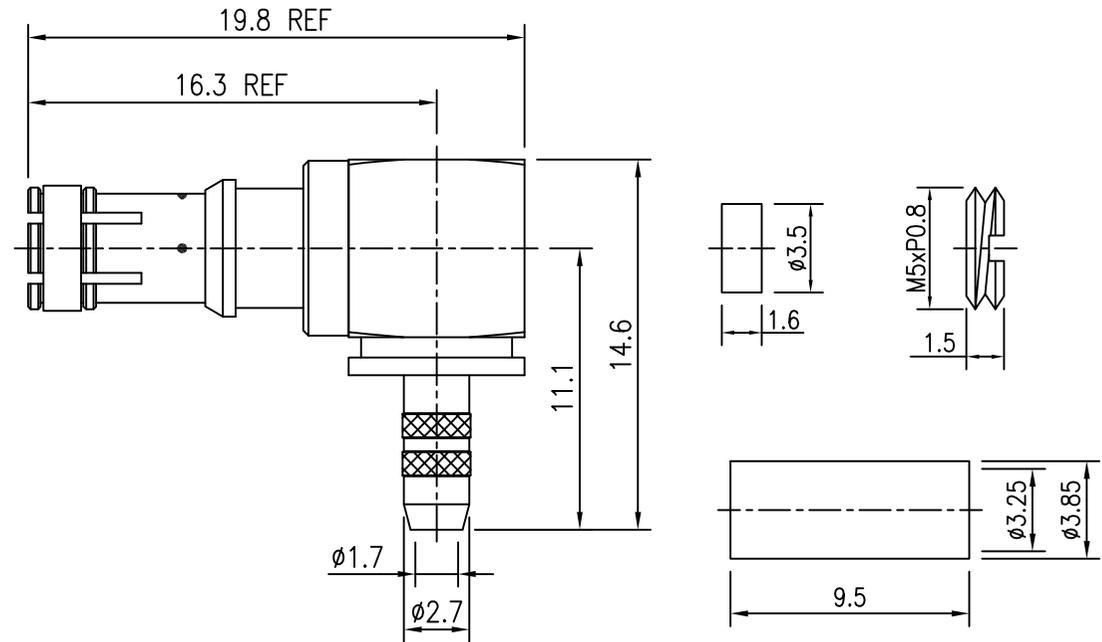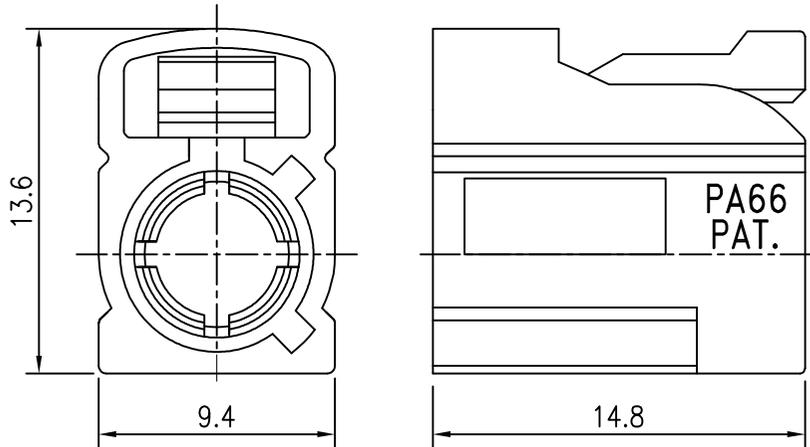

09	Ferrule	Brass	Nickel	1
08	Nut	Brass	Nickel	1
07	Housing	PA66	Bordeaux	1
06	Retaining Ring	Beryllium	Nickel	1
05	Insulation	Delrin	None	1
04	Insulation	PTFE	White	1
03	Pin	Phosphor Bronze	Gold	1
02	Body	Brass	Nickel	1
01	Body	Brass	Nickel	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

DIMENSIONS ARE IN MILLIMETERS
UNLESS STATED OTHERWISE.
TOLERANCES

0.5–6 = ±0.2
6–30 = ±0.4
30–120 = ±0.6
120–315 = ±1
315–1000 = ±1.6
1000–2000 = ±2.4

SIZE	MATERIAL		FINISH	
	APPROVE	CHECK	DESIGNER	DRAW
5 : 1				
UNIT				
mm				ANDY
PROJECT				
⊕ ⊞				20260225

NAME	Fakra Female Code D Right Angle Rotary housing for RG-174U Cable		
MODEL			REV.
DWG			REV.
TITEL			
 JY CHYUN ENTERPRISE CO., LTD. JY CHYUN			